


KWC

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1116 | 3600008354 | EAN/GTIN: 7612987618777
Taps | Electronic taps

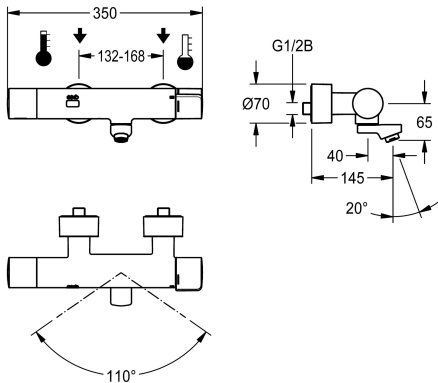

Article Number

3600008356
200mm spout - Integrated C-Module

3600008354
Spout 145mm -Integrated C-module

3600008357
Projection 260 mm

spout projection

200 mm

145 mm

260 mm

F5E-Therm thermostatic mixer DN 15 for wall mounting with lockable swivelling outlet, for sanitary facilities. Opto-electronic control, activation on hand reflection. Pre-fitted C-module unit for radio-controlled parameterisation, read-out of statistical data, realisation of predefined calendar functions as well as grouping of taps to perform predefined control functions via the necessary app. Thermostat with metal handle with adjustable, turn-proof temperature stop With the option of manual thermal disinfection. For connection to hot and cold water. Control electronics, solenoid

valve cartridge, 6 V lithium battery (CR-P2) and sensor in all-metal housing, polished chromium-plated brass. Laminar jet controller with integrated flow rate controller 6.0 l/min. With adjustable and lockable connections with backflow preventers and strainers, fully covered by depth-adjustable screw rosettes. 145 mm projection. Activated water hygiene flushing 24 hours after last activation, safety switch-off for continuous reflection and saving of statistical data.

Technical Data

C-module
with backflow preventer
compatible A3000 open
default automatic hygiene flus
default flow time
depressurised
with filter
adjustable flow time
functional principle
hygiene flushing
diameter nominal
inlet size
Locking mechanism
material fitting
maximum flow time
minimum flow pressure
minimum flow time
type of mixing
number of batteries

optional
true
false
24h after the last activity
10 Seconds
false
true
true
electronic self-closing
true
DN 15
G 1/2 B
Top section, non-ceramic
brass-look
255 Seconds
1 bar
1 Seconds
Thermostatic
1



KWC

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1116 | 3600008354 | EAN/GTIN: 7612987618777
Taps | Electronic taps

Parameterization	remote control / app
Pop-up waste set	false
power supply connection	Battery 6 V
power consumption	1.5 Voltampere
Type of power supply	Battery
protective system IP	IP59K
with rosettes/cover plate	true
protective shutdown	true
sound insulation	false
Spout	rotating, bottom
spout projection	145 mm
surface finish fitting	chromed
surface treatment fitting	polished
temperature limit	true
thermal disinfection	manual
with transformer/power supply	false
type of batteries	CR-P2 Lithium battery 6V
type of mounting	wall mounting
type of operation	sensor operation
type of sensor	opto-electronic sensor
type of tap	bib tap
volume flow rate at 3 bar	0.1 l/s
water connection	S-connections
Accent colour	none
Basic colour	chrome-look (glossy)

Optional Accessories



Remote control

2030036654
ACEX9005

2-button remote control for fittings F3 and F5

2030036849
ACEX9004

Theft-proof housing for aerator

2000104778
ZTAPS0005

Spare Parts

KWC

Electronic thermostatic wall-mounted mixer with battery operation and pre-fitted C-module unit

Modell-Linie: F5E | F5ET1116 | 3600008354 | EAN/GTIN: 7612987618777
Taps | Electronic taps



For lithium batteries

3600002063
ACEX9023

F5 Foil




2030053034
ASET2010

Lithium battery 6 V

2000104846
EPRTR0008

Screw rosette

2030046777
ASXX9003



Cover

2030003258
EAQLT0002

Solenoid valve cartridge


2030045522
ACXX9002

Thermocouple

2030003300
EAQLT0004

Laminar jet regulator

2030012352
ETAPS0037



Swivel spout, 40 mm

2030035159
ASXX1003

Temperature stop

2030003296
EAQLT0003

Hexagonal socket wrench

2030047722
ACEX9011