NOVALAB safety shower with toggle valve and tie-rod actuation for surface mounting, water connection on all sides



Attributes

- Water connection on all sides
- Pull rod guided, with triangle handle and sealing option
- Actuation optionally right/left
- Wall flange with toggle valve, wall bracket and safety shower head
- Axially sealing valve
- Headwork can be replaced without removing the valve body
- Emergency shower head with nozzle holes and swirl discs for optimum spray jet
- Replaceable nozzle base, nickel-plated
- Self-draining shower head and wall bracket by gradient
- Fitting does not close automatically
- Safety shower head with 5 nozzle bores (approx. 30 l/min at 1 bar flow pressure) or 7 nozzle bores (approx. 60 l/min at 1.5 bar flow pressure)
- Wasseranschluss: Innengewinde G3/4
- Brass EPS-coated green RAL 6032
- Fulfils the requirements of DIN EN 15154-1 and the German BGI/GUV-I 850-0 ‘Safe working in laboratories’
- With safety sign ‘safety shower’ as a sticker in accordance with ISO 3864-1
- With mounting material and technical product information


Variants	Art.-No.:
safety-shower head with 5 jets Volumetric flow rate approx. 30 l/min at 1 bar flow pressure	**60 1840 35**
safety-shower head with 7 jets Volumetric flow rate approx. 60 l/min at 1,5 bar flow pressure	**60 1845 35**


NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin


Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de


Dimensional Drawings

Art.-No.: 60 1840 35

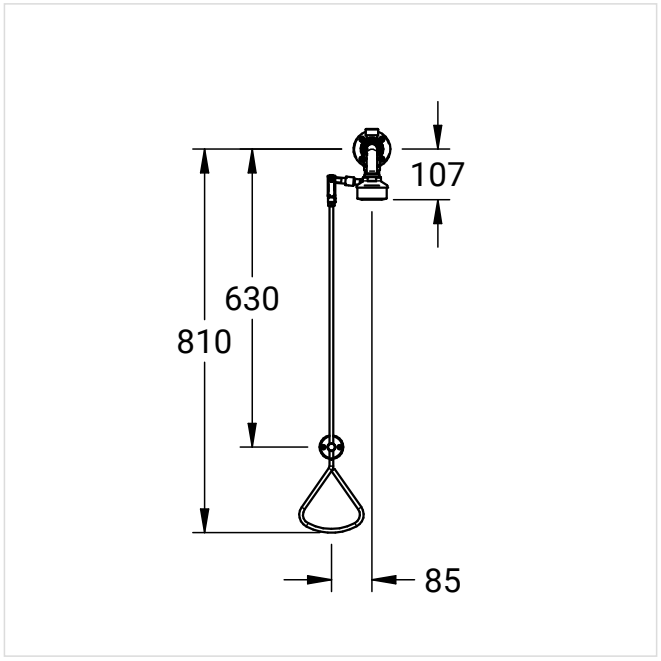

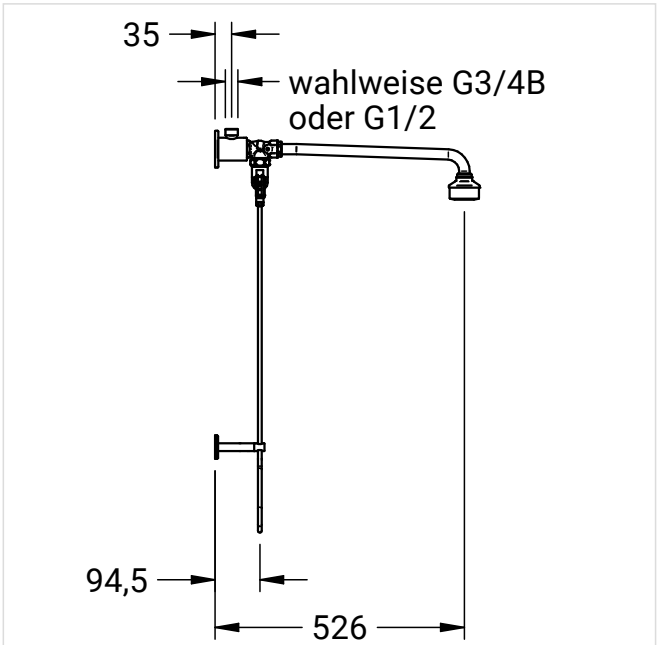

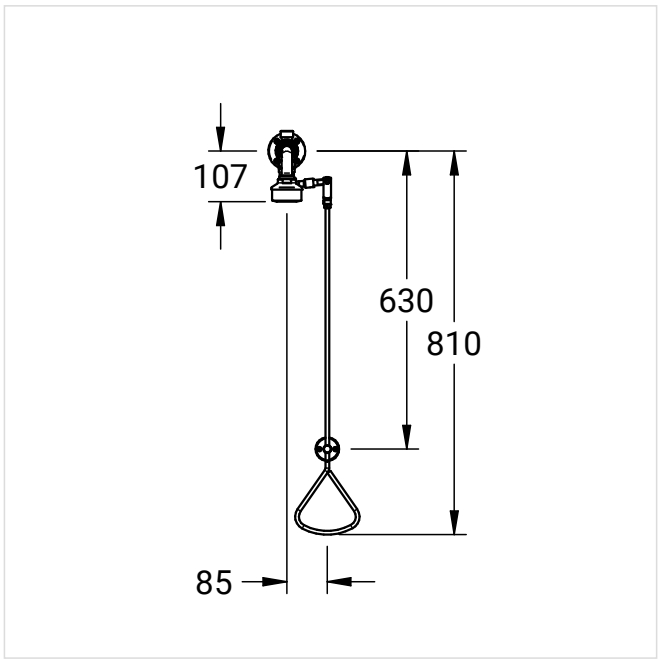

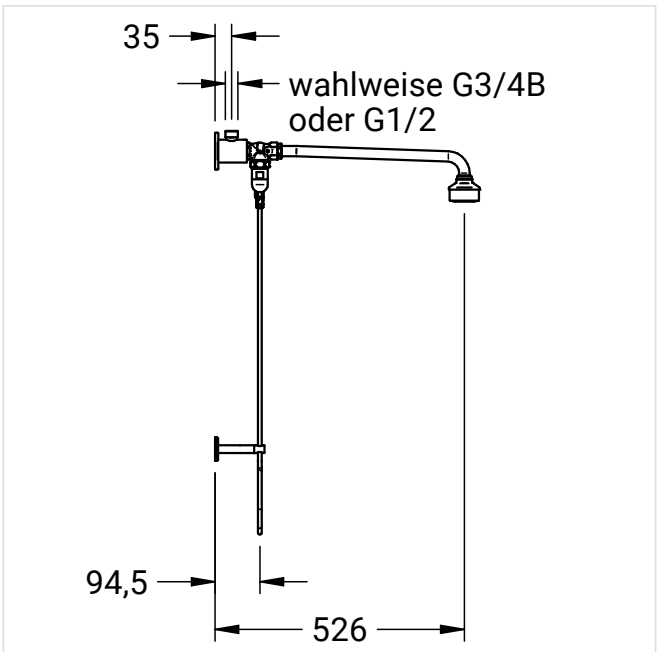

Pressure Loss Curve

