
NOVALAB laboratory angle tap with swivel U spout for fully demineralized water (WDC), connection thread G1/2"

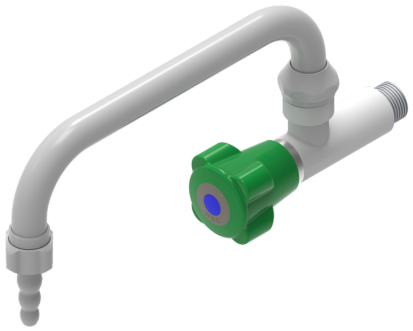


Attributes


- Temperature range 0- 95 °C
- Valve body high-performance plastic PVDF, grey RAL 7035
- Four-wing ergonomic operating handle according to DIN 13792
- Headwork made of high-performance plastic
- Nominal pressure PN 10 bar
- Connection/fastening thread G1/2" - 12 mm long
- Hose nozzle diameter 10/13 mm

Variants	Art.-No.:
	70 0173 25 47

Dimensional Drawings

Art.-No.: 70 0173 25 47



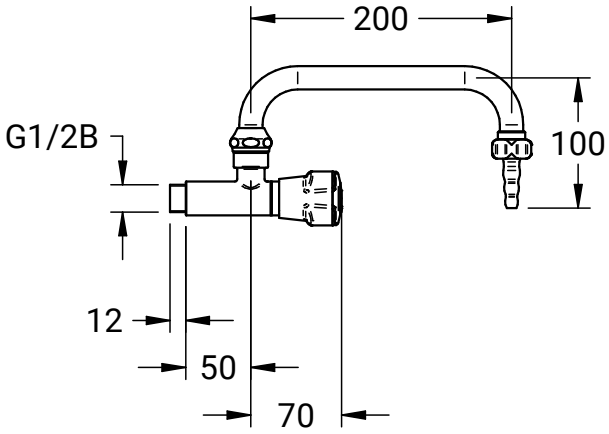

NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin

Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de