NOVALAB laboratory bench mounted infrared mixer, U-spout (WPC/WPH)




Attributes


- With ceramic disc
- All-metal valve body, EPS-coated, grey RAL 7035
- Nominal pressure 8 bar
- Connection hoses G3/8"
- Mit Luftsprudler
- With strainers
- With backflow preventers
- Sensor for contactless activation
- Safety shutdown at continuous reflection
- Integrated solenoid valve cartridge and programmable electronic controls
- Integrated hygienic flushing (can be switched off)

Variants	Art.-No.:
Fixed U-spout, Power supply: Battery	**50 2003 00**
steady U-spout, Power supply: plug-in	**50 2004 00**
swivel U-spout, Power supply: Battery	**50 2005 00**
swivel U-spout Power supply: plug-in	**50 2006 00**

Dimensional Drawings

Art.-No.: 50 2003 00

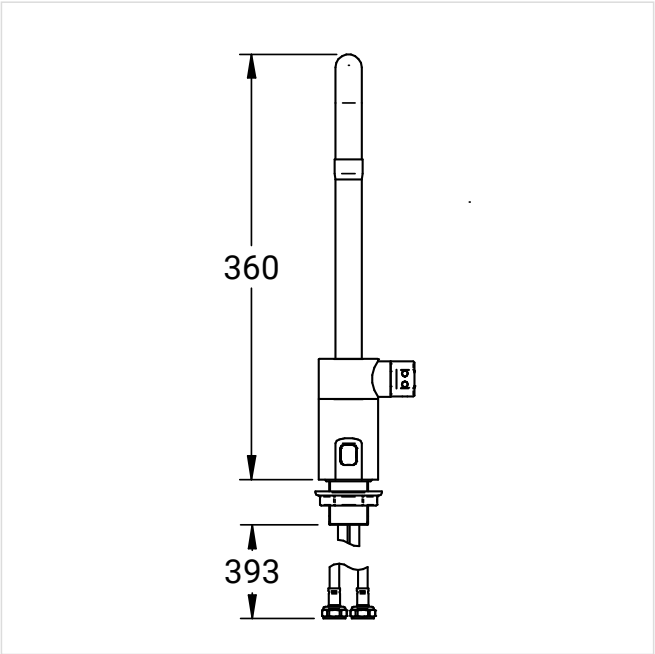

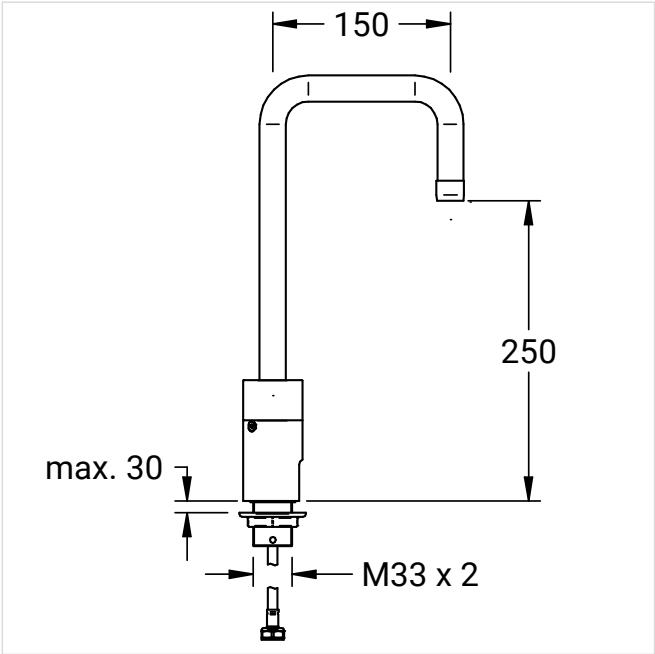

NovaLab GmbH
Brunsbütteler Damm 446
13591 Berlin

Phone +49 (0) 30 36 403 36 20
Fax +49 (0) 30 36 403 36 26
Mail: info@novalab-gmbh.de