NOVALAB laboratory mixer, swivel spout for water (WPC/WPH) with hygienic flushing, connection thread G3/8"




Attributes


- All-metal valve body, EPS-coated, grey RAL 7035
- Four-wing ergonomic operating handles according to DIN 13792
- Nominal pressure PN 10 bar
- With integrated hygienic flushing
- Integrated programmable control electronics (selectable flush times and intervals)
- Hygienic flushing device with integrated solenoid valve cartridge for cyclical flushing of the cold and hot water pipe over the spout

Variants	Art.-No.:
With aerator, Power supply: battery, Headworks with cone seal	**70 0392 35 37**
with aerator, Power supply: battery, Headworks with ceramic disc seals 180°	**70 0392 35 37 02**
with aerator, Power supply: plug-in power supply, Headworks with cone seal	**70 0393 35 37**
with aerator, Power supply: plug-in power supply, Headworks with ceramic disc seals 180°	**70 0393 35 37 02**
with hose tail connector, Power supply: battery, Headworks with cone seal	**70 0390 35 37**
with hose tail connector, Power supply: battery, Headworks with ceramic disc seals 180°	**70 0390 35 37 02**
with hose tail connector, Power supply: plug-in power supply, Headworks with cone seal	**70 0391 35 37**
with hose tail connector, Power supply: plug-in power supply, Headworks with ceramic disc seals 180°	**70 0391 35 37 02**


Dimensional Drawings


Art.-No.: 70 0392 35 37

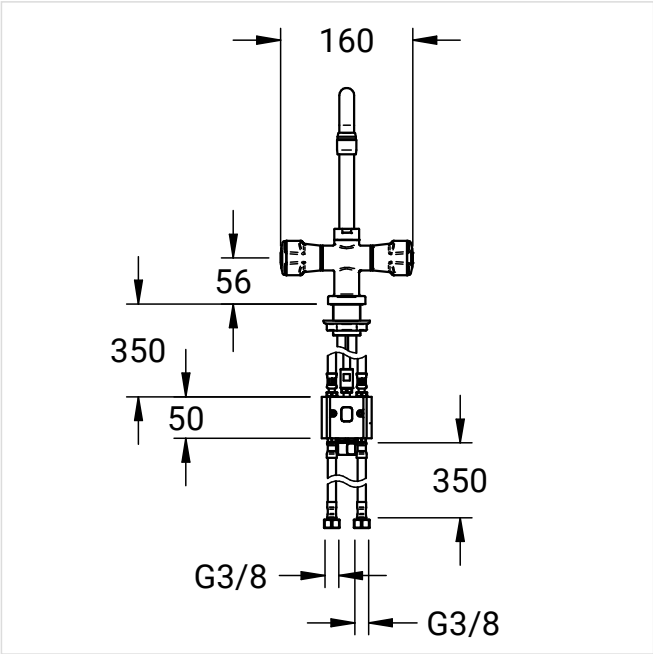

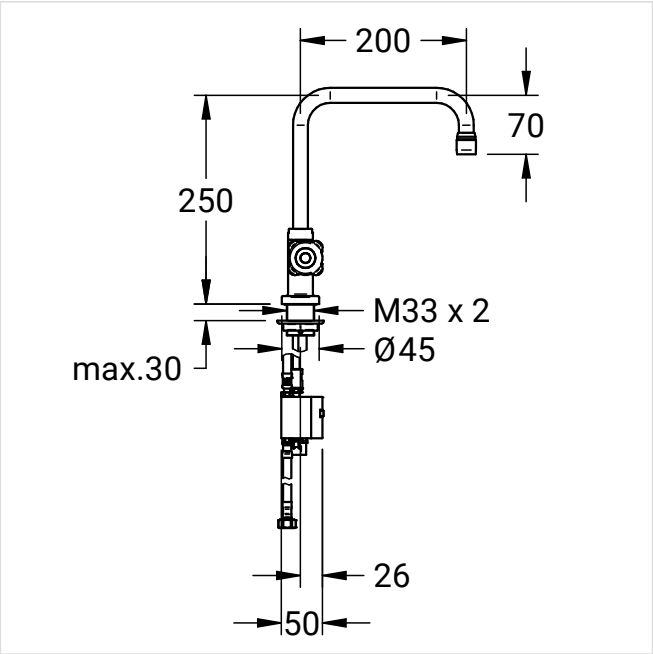

Art.-No.: 70 0390 35 37

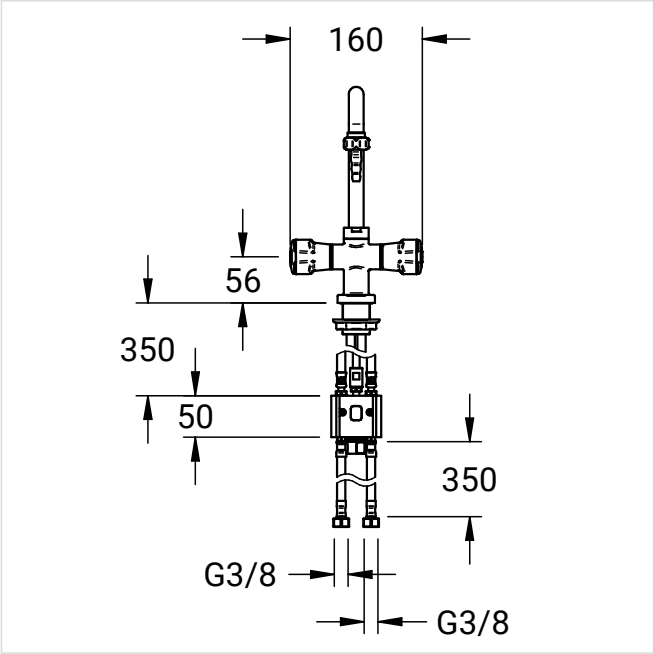

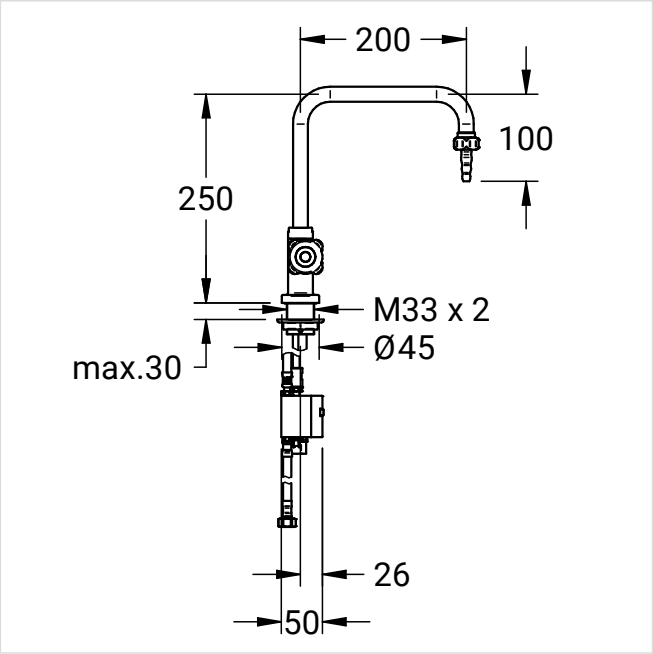

Further product images



Art.-No.: 70 0390 35 37