

Circular toilet paper dispenser

EN

Manual

Industrial roll paper/3 standard rolls

Ref. PR2787/B/C/CS

Ref. PR2789/B/C/CS



PR2787/PR2789

Steel

White



PR2787B/PR2789B

Steel

Black



PR2787C/PR2789C

Stainless Steel AISI 304

Bright



PR2787CS/PR2789CS

Stainless Steel AISI 304

Satin

OVERVIEW

- Manual circular toilet paper dispenser for wall mounting.
- Suitable for high-traffic washrooms.
- Code PR2787/B/C/CS comes standard with a roll paper spindle.



- Code PR2789/B/C/CS comes standard with a standard toilet paper spindle.




- The spindles can be optionally swapped.

TECHNICAL DATA

Body and lid thickness	*0,8 mm*
Weight (net)	*1,70 kg*
Industrial roll capacity	*Max. Ø 275 mm*
Industrial roll width	*Max. 115 mm*
Standard roll capacity	*3 standard rolls*
Industrial roll tube	*Min. Ø 45 mm*
Standard roll tube	*Min. Ø 12 mm*

- Optional accessories:
  - **KIT 2789:** optional spindle for 3 rolls.




  - **9391005SMD:** optional spindle for industrial roll paper.



COMPONENTS AND MATERIALS

- **Body:** one-piece, circular shape.
- **Lid:** one-piece, hinged and attached to the body with rivets. Features a front slot to view contents, protected by a 0.3 mm thick transparent PVC sheet.
- **Back:** one-piece with spacer support. Mounted on the wall with 3 screws and anchors.
- **Spindle RC9391005SMD:** made of polyamide 6 (PA6), holds 1 roll of roll paper.
- **Spindle KIT2789:** made of thermoplastic, holds 3 standard domestic toilet paper rolls.

DIMENSIONS

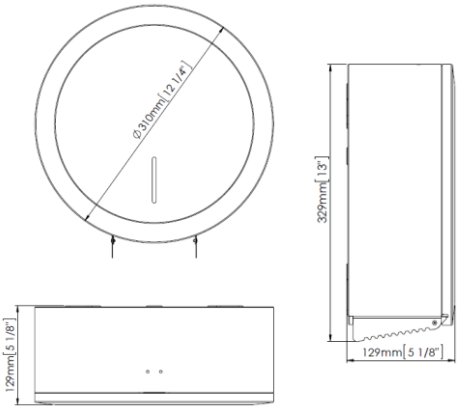

Mediclinics S.A. reserves the right to make changes or modifications to the products and their specifications without prior notice.

Circular toilet paper dispenser

GUIDE SPECIFICATION

Manual circular toilet paper dispenser shall be wall-mounted. The empty dispenser shall weigh 1,70 kg. The housing shall be steel in white or black finish, or AISI 304 stainless steel in bright, satin, or various PVD finishes. Body shall be 0,8 mm thick, diameter 310 mm. Hinged cover shall be 0,8 mm thick, fixed with two stainless steel rivets, and shall have a front slot to view paper level. Rear plate shall be 0,6 mm thick, wall-mounted with 3 screws and Ø6 mm wall plugs. Polyamide 6 spindle shall be removable, with 2 positions, allowing different paper refill sizes. Optional kit with spindle for 3 standard toilet rolls. Optional adapter with spindle for 1 industrial roll paper. The dispenser shall accommodate rolls up to Ø275 mm and width up to 115 mm.

ASSEMBLY / RECOMMENDED INSTALLATION HEIGHTS

65-75 cm at lower point // 70 cm at lower point (for handicapped people).

Mediclinics S.A. reserves the right to make changes or modifications to the products and their specifications without prior notice.