
Product data sheet

Item number

QSP01

Surface

Universal 6V Power Supply

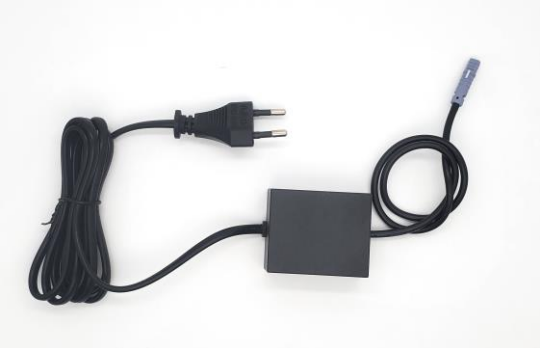

QTOO
collection

Product	Universal 6V Power Supply
Tender text	Qtoo collection, Universal 6V Power Supply for 240W
Product specification	Storage temperature -25 to +70°C Operating humidity 5 to 95% RH Operating temperature 0 to 60°C* Input voltage 100 to 240 VAC Input frequency 50 to 60Hz Output voltage 6V to 6.8V Output power 6W Output capacity 4400 µF Ripple voltage ≤100mV peak to peak Surge protection 2.5kV Protection CLASS II / IP67 Standards CE, CQC, CB, UL, DOE VI, ROHS, REACH, EN15091, CJ/T194 Length of cable from the plug to the transformer: 1500mm Length of cable from the transformer to the tap: 80mm
Available finishes	
Spare parts/ accessories	
Mounting	https://dline.com/mounting-instructions/

Product care

d line products are produced in the highest quality marine grade AISI 316 stainless steel. To sustain the unique d line finish please follow the below instructions:
- Wash down the surfaces using soapy water or mild detergent
- Always thoroughly rinse off with clean water
- To complete the cleaning procedure dry/polish the surface with a soft dry cloth

Please do not use scouring powder, steel wool, chloride based detergents or other aggressive cleaning products as these may damage the surface.
If spots or corrosion appear on the surface it is not due to the stainless steel quality, but to impurities in the environment, aggressive conditions or improper or insufficient cleaning.

d line Jyllingevej 59 | DK-2720 Copenhagen | dline.com | service@dline.com